


MAXI-R160



Contact

Jutta Geurtz
+49 2336 808 364
jgeurtz@titan-schwelm.de

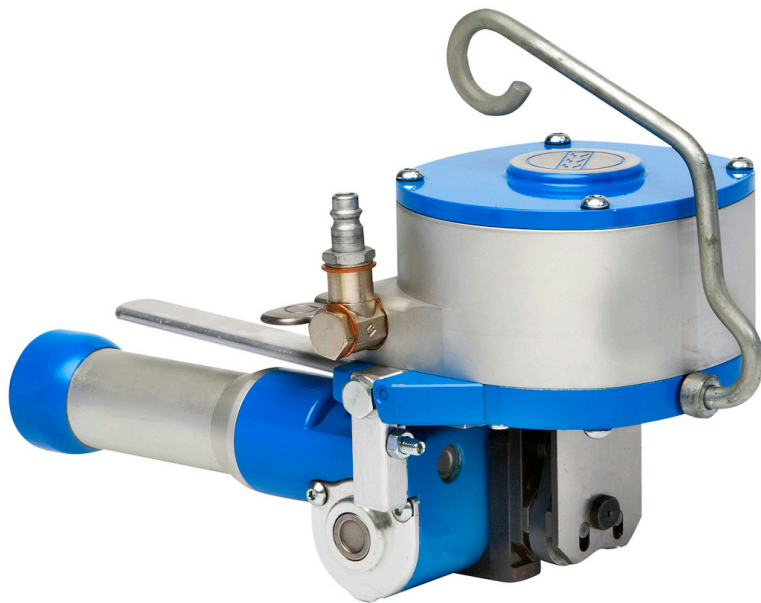

Pneumatic strapping tool for steel strap

01 Lorem ipsum dolor sit amet, consetetur sadipscing elitr, sed diam nonumy eirmod tempor invidunt ut labore et dolore magna aliquyam erat, sed diam voluptua.

02 At vero eos et accusam et justo duo dolores et ea rebum. Stet clita kasd gubergren, no sea takimata sanctus est Lorem ipsum dolor sit amet.

03 Lorem ipsum dolor sit amet, consetetur sadipscing elitr, sed diam nonumy eirmod tempor invidunt ut labore et dolore magna aliquyam erat, sed diam voluptua.

04 At vero eos et accusam et justo duo dolores et ea rebum. Stet clita kasd gubergren, no sea takimata sanctus est Lorem ipsum dolor sit amet.

05 Lorem ipsum dolor sit amet, consetetur sadipscing elitr, sed diam nonumy eirmod tempor invidunt ut labore et dolore magna aliquyam erat, sed diam voluptua.

Technical Data

Kind of drive (tensioning)	Pneumatic
Tension force	max. 4,000 N (adjustable)
Kind of drive (sealing)	Pneumatic
Seal (Type)	RS 13 ; 16 ; 19
Strap feeding speed	0,11 m/s 0.36 ft/s
Dimensions	320 x 145 x 220 mm (L x W x H) 12.6 x 5.7 x 8.7" (L x W x H)
Weight	4,5 kg 9.9 lb

Air pressure	max. 4,0 bar Fließdruck (für 13 mm Band) max. 5,0 bar Fließdruck (für 16 mm Band) max. 6,0 bar Fließdruck (für 19 mm Band) max. 4.0 bar flow pressure (for 1/2 " strap) max. 5.0 bar flow pressure (for 5/8 " strap) max. 6.0 bar flow pressure (for 3/4 " strap)
Air consumption (during tensioning)	5 NI / s
Air consumption (during sealing)	4 NI / s
Cross-section	G 1/4 "
Handarm vibration	information currently not available
Noise level	76 dB (A)

Strap/Joint

Type of strap	Steel strap
Strap	Automatenband MEGABAND®
Strap width	13, 16, 19 mm 1/2" ; 5/8" ; 3/4"
Strap thickness	0,40 - 0,60 mm (for Automatenband) 0,40 - 0,63 mm (for MEGABAND®) 0.016 - 0.024" (for Automatenband) 0.016 - 0.025" (for MEGABAND®)
Kind of seal	Seal-joint (single notch)
Sealing strength (depending on strap quality, strap dimensions)	up to approx. 50% of the strap breaking load

Application

Strapping of pipes and coils between coilers with a circular blank distance from 6.3 in.